

Accessories



## Accessories for softliQ

*For individual requirements*

grünbeck

# FLEXIBLE POSITIONING

## Connection angle

- For limited space in the room
- Connection hoses run closer to the system
- The system is therefore closer to the wall
- For softliQ:MD32, softliQ:MD12i, softliQ:PB20 and safeliQ:EB30



Order no. 187 865

## Wall bracket for softliQ:SD

- For small floor space
- For water pipes and drain connections located at higher levels
- Offers additional storage space below the system
- For softliQ:SD series



Sample illustration of softliQ:SD and regeneration salt supply

Order no. 189000010000

# COMBINING PRODUCTS

## Double screw connection 1 1/4"

- For direct connection of 1" filters (pureliQ or BOXER) to the connection block of the water softener
- For direct connection of safety device protectliQ:A and 1" filters (pureliQ or BOXER)
- For all softliQ systems (except for softliQ:MD38)



Order no. 115 334

## Installation kit softliQ

- Space-saving installation in 100 mm installation dimension of existing filter (size 1", e.g. BOXER X, pureliQ, FS-B)
- Quick and cost-efficient installation of a water softener without any further piping work



Order no. 188 865

# EXTENSIONS AND DRAIN CONNECTION

## Extension kits

- Extension of existing connection hoses
- Available in 3 sizes
- Extension by 80 cm each



### Order no.

**187 860e**

For softliQ:SD series (DN 22)

**187 660e**


For softliQ:MD32 (DN 25)

**187 680e**

For softliQ:MD38 (DN 32)

## Drain connection

- Drain connection DN 50 with siphon according to DIN EN 1717
- For small water softeners (softliQ)
- For backwash filters (BOXER RX/RDX, pureliQ:R/RD, pureliQ:A/AD, MR/MRA)
- For filling groups (thermaliQ:SB)
- For system separators
- Including exchangeable connection piece DN 50 for fixed connection piping

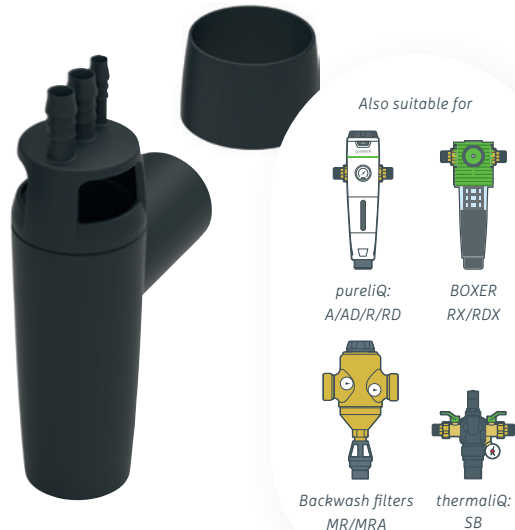

**Order no. 188 875**

# SUITABLE WATER FOR EVERY DEMAND

## Supplementary blending valve for softliQ

- To generate a second blending hardness (e.g. for a separate pipe towards the kitchen)
- Installation between the system's connection block and the connection hoses
- For all softliQ systems (except for softliQ:MD38)



Order no.187 870

## Supplementary soft water outlet for softliQ

- As 0 °dH outlet
- Installation between the system's connection block and the connection hoses
- For softliQ:SD series



Order no. 187 875

# INSULATION AND HYGIENE

## Insulation kit softliQ:SD

- Professional insulation of connection technology according to DIN 1988-200:2012-05
- Hygienic benefit
- Stagnation water heats up to ambient temperature less quickly
- Reduction of condensation water that develops due to the difference in temperature
- For softliQ:SD series



Order no. 188 870



**BECOME A  
WATER  
EXPERT!**



**You can find the accessories for  
the softliQ water softeners in our  
catalogue Residential Applications |  
Sanitary and Heating as well.**

© 05.2023 · We reserve the right to modifications and errors.



# grünbeck

Grünbeck  
Wasseraufbereitung GmbH  
Josef-Grünbeck-Str. 1  
89420 Hoechstädt  
GERMANY  
+49 9074 41-0

[info@gruenbeck.com](mailto:info@gruenbeck.com)  
[www.gruenbeck.com](http://www.gruenbeck.com)